


Find your product and get support

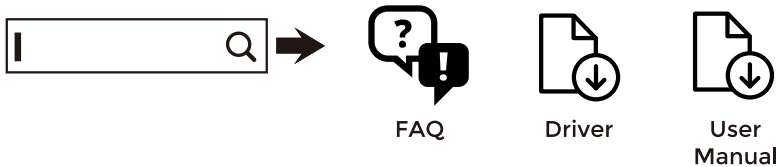

Europe <https://aoc.com/uk/support> Россия <https://aoc.com/ru/support>

Australia https://au.aoc.com/user_manual Hong Kong S.A.R. https://hk.aoc.com/user_manual

中國台灣 https://tw.aoc.com/user_manual Indonesia https://id.aoc.com/user_manual

日本 https://jp.aoc.com/user_manual 한국 https://kr.aoc.com/user_manual

Malaysia https://my.aoc.com/user_manual Myanmar https://mm.aoc.com/user_manual

New Zealand https://nz.aoc.com/user_manual Philippines https://ph.aoc.com/user_manual

Singapore https://sg.aoc.com/user_manual ประเทศไทย https://th.aoc.com/user_manual

Việt Nam https://vn.aoc.com/user_manual Middle East https://me.aoc.com/user_manual

South Africa https://za.aoc.com/user_manual Brasil <https://aoc.portaltpv.com.br/>

India <https://aoc.com/in-en/support> US <https://aoc.com/us/support>

Canada <https://aoc.com/ca-en/support>

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE




Product information for EU/UK Energy



XXXXXXXXXXXX


AOC
GAMING

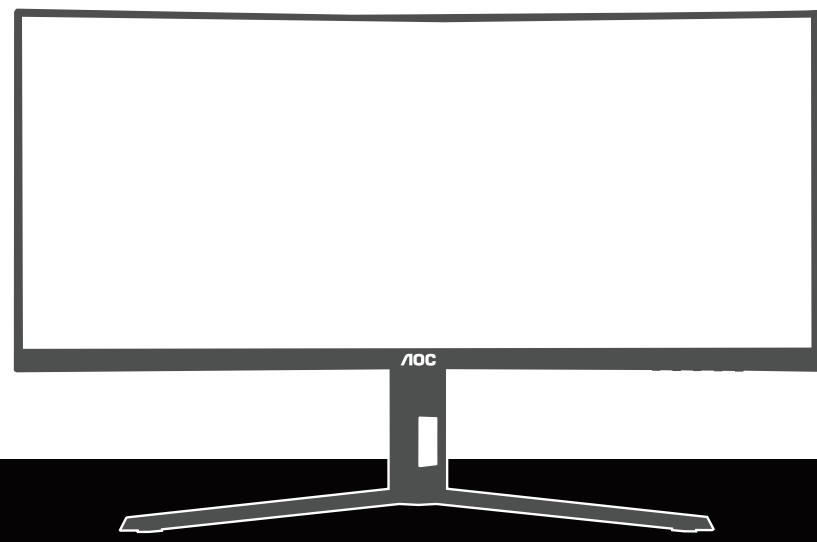


QUICK START GUIDE
CU34G4ZCA
AOC GAMING MONITOR

©2026 AOC. All rights reserved


WWW.AOC.COM

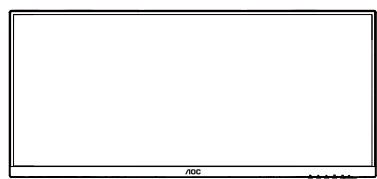

Monitor




Stand




Base

*



Quick Start Guide



Warranty Card



Power Cable

*



HDMI Cable

*



DisplayPort
Cable

*



USB C-C
Cable


*



USB Cable


*Different according to countries/regions
Display design may differ from that illustrated

1

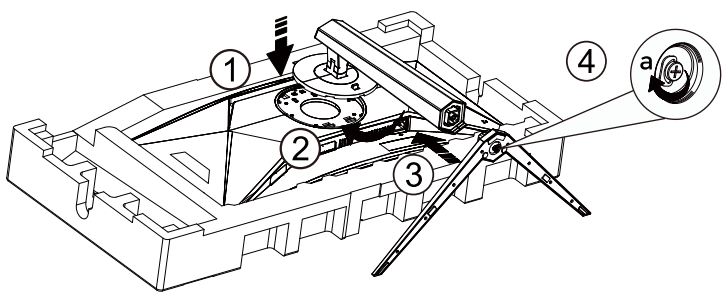


Specification for screw:
a M6x23mm
(effective thread 5.5mm)


2

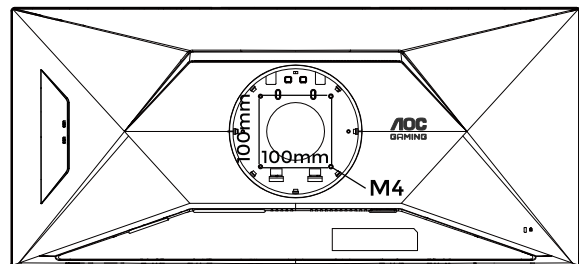

x4 Wall Mounting: M4*(10+X)mm
(X=Thickness of Wall mount bracket)

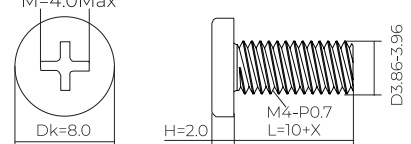

3

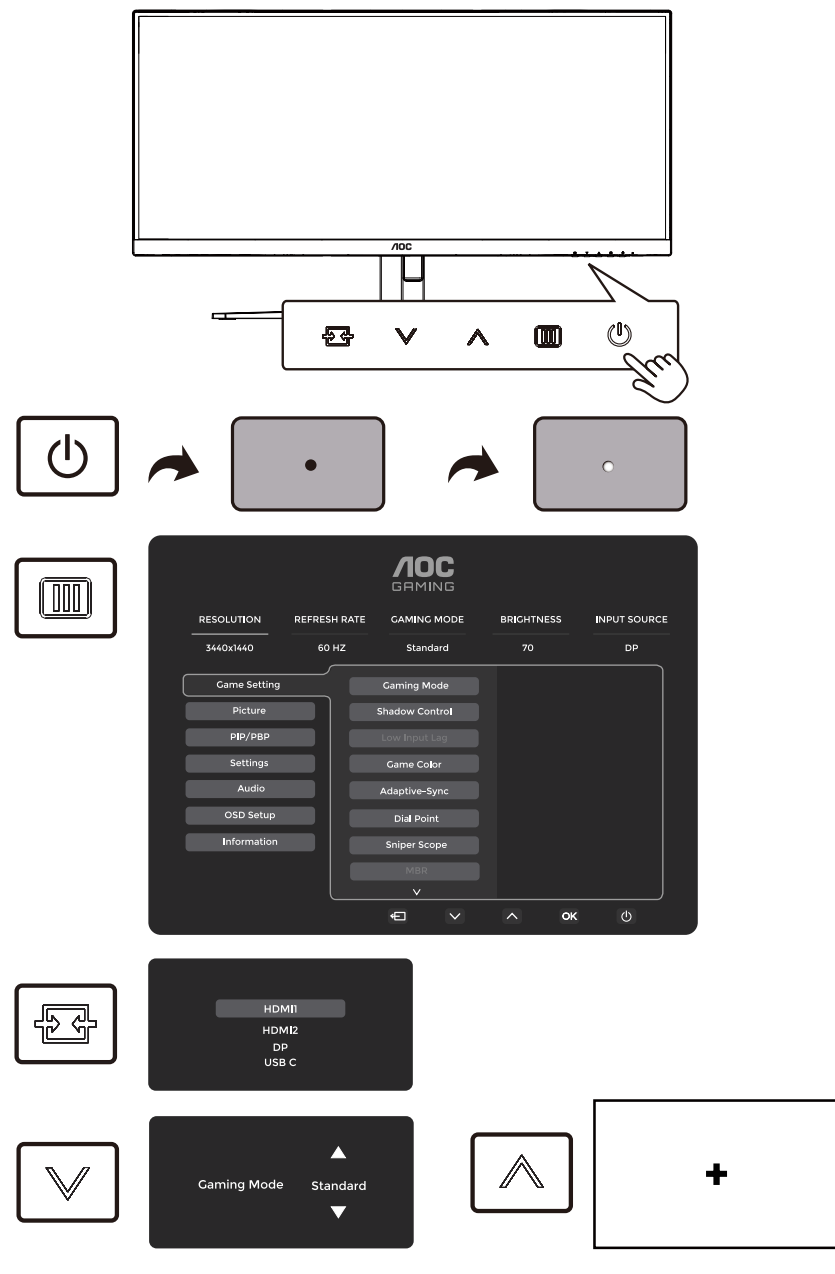

4

General Specification

Panel	Model Name	CU34G4ZCA	
	Driving System	TFT Color LCD	
	Viewable Image Size	86.4cm Diagonal(34" Wide Screen)	
	Pixel Pitch	0.23175mm(H) x 0.23175mm(V)	
Others	Horizontal Scan Range	30k~380kHz	
	Horizontal Scan Size(Maximum)	797.22mm	
	Vertical Scan Range	48~250Hz	
	Vertical Scan Size(Maximum)	333.72mm	
	Max Resolution	3440x1440@250Hz ^[1]	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~ 50/60Hz 2A	
	Power Consumption	Typical(Default Brightness And Contrast)	31W
		Max. (Brightness = 100, Contrast =100)	≤200W
		Standby Mode	≤ 0.5W
Physical Characteristics	Dimensions(with stand)	808.1x(435.7~534.7)x269.4mm (WxHxD)	
	Net Weight	8.60kg	
Environmental	Connector Type	HDMIx2/DisplayPort/USB C/USBx2/USB UP/ Earphone out	
	Signal Cable Type	Detachable	
Environmental	Temperature	Operating	0°C~40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (Non-Condensing)
		Non-Operating	5%~93% (Non-Condensing)
	Altitude	Operating	0m~5000m (0ft~16404ft)
		Non-Operating	0m~12192m (0ft~40000ft)

[1]:Overclocking is achieved when resolution is at 3440x1440@250Hz. If any display error occurs during overclocking,please adjust the refresh rate to 240Hz.