





Find your product and get support




Product information for EU/UK Energy

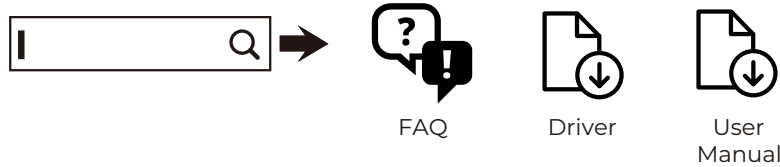

Q41G27M3615A28

AOC
GAMING

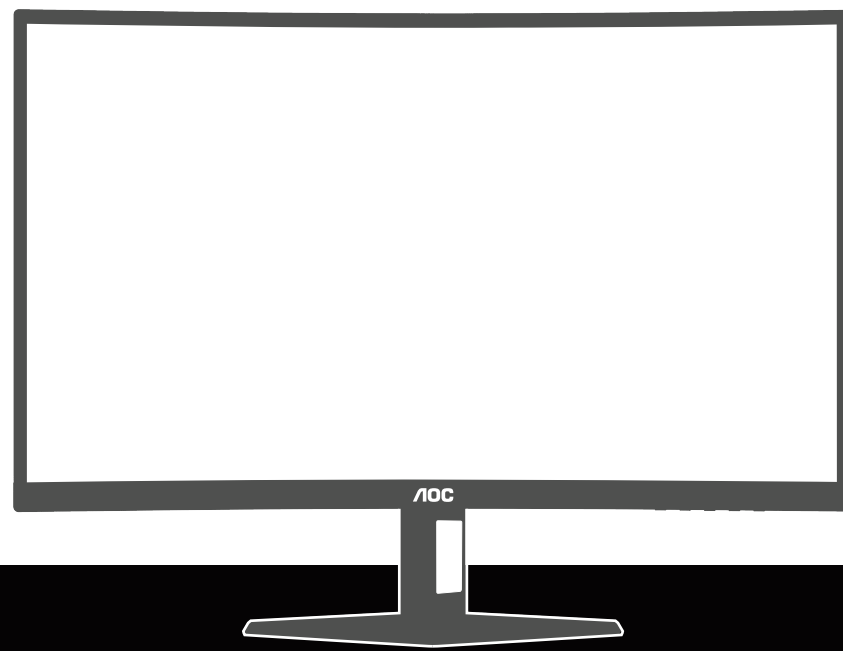


QUICK START GUIDE


CQ27G4ZE
AOC GAMING MONITOR

©2026 AOC. All rights reserved


WWW.AOC.COM



Monitor




Stand



Base



Quick Start Guide



Warranty Card



Power Cable

*



HDMI Cable


*



DisplayPort Cable


*Different according to countries/regions
Display design may differ from that illustrated

1

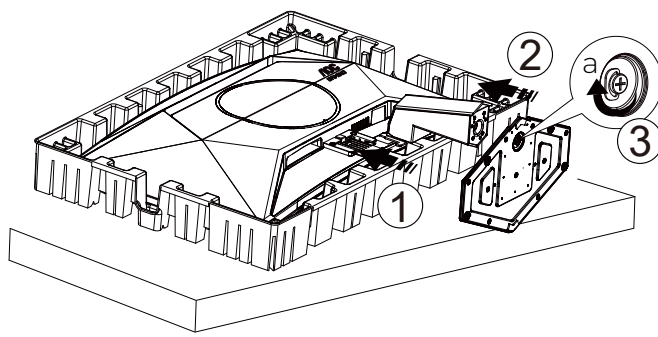


Specification for screw:
a M6x23 mm
(effective thread 5.5 mm)


2

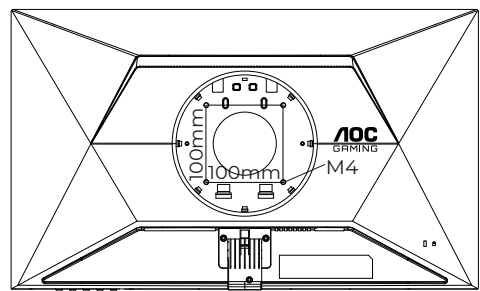

X4 Wall Mounting: M4*(10+X)mm
(X=Thickness of Wall mount bracket)

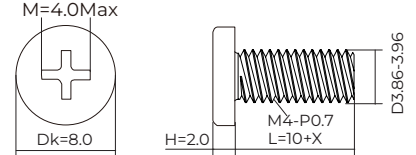

3

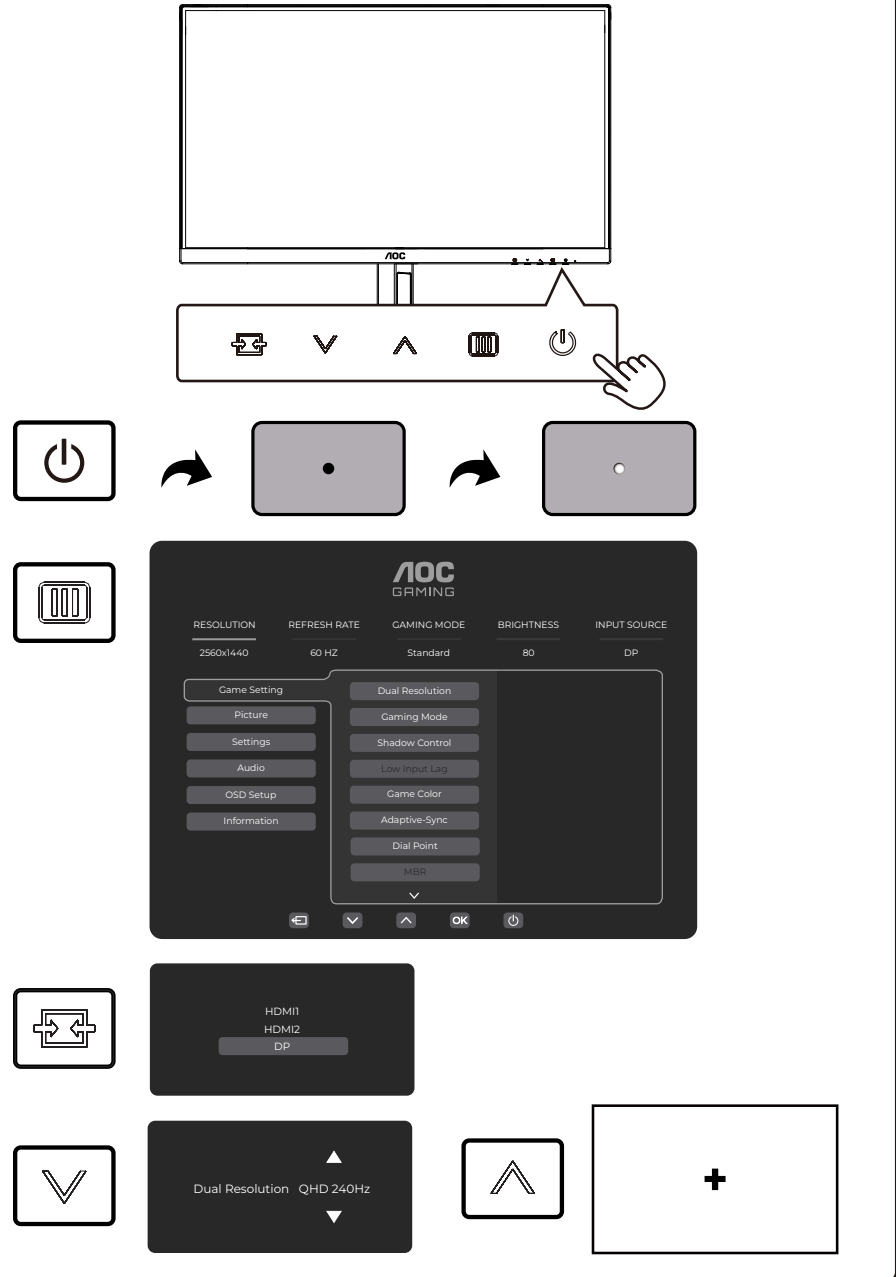

4

General Specification

Panel	Model Name	CQ27G4ZE	
	Driving System	TFT Color LCD	
	Viewable Image Size	68.5cm diagonal(27" Wide Screen)	
	Pixel Pitch	0.2331mm(H) x 0.2331mm(V)	
Others	Horizontal Scan Range	HD:30k~230kHz (HDMI) 30k~310kHz (DisplayPort) QHD:30k~230kHz (HDMI) 30k~400kHz (DisplayPort)	
	Horizontal Scan Size(Maximum)	596.736mm	
	Vertical Scan Range	HD:48~280Hz (HDMI) 48~400Hz (DisplayPort) QHD:48~144Hz (HDMI) 48~260Hz (DisplayPort)	
	Vertical Scan Size(Maximum)	335.664mm	
	Max Resolution	HD:1280x720@280Hz (HDMI) 1280x720@400Hz (DisplayPort) QHD:2560x1440@144Hz (HDMI) 2560x1440@260Hz* (DisplayPort)	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~ 50/60Hz 1.5A	
	Power Consumption	Typical (default brightness and contrast)	25W
		Max. (brightness =100, contrast =100)	≤ 51W
		Standby Mode	≤ 0.5W
Physical Characteristics	Dimensions (with stand)	611.5X462X194.2mm(WxHxD)	
	Net Weight	4.93kg	
	Connector Type	HDMIx2/DisplayPort/Earphone	
Environmental	Temperature	Operating	0°C~ 40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (Non-Condensing)
		Non-Operating	5%~93% (Non-Condensing)
	Altitude	Operating	0m~5000m (0ft~16404ft)
		Non-Operating	0m~12192m (0ft~40000ft)

*Overclocking is achieved when resolution is at 2560x1440@260Hz. If any display error occurs during overclocking, please adjust the refresh rate to 240Hz.