Find your product and get support

FAQ | Driver | User Manual

Europe
https://aoc.com/uk/support

Россия
https://aoc.com/ru/support

Australia
https://au.aoc.com/user_manual

Hong Kong S.A.R.
https://hk.aoc.com/user_manual

中國台灣
https://tw.aoc.com/user_manual

Indonesia
https://id.aoc.com/user_manual

日本
https://jp.aoc.com/user_manual

한국
https://kr.aoc.com/user_manual

Malaysia
https://my.aoc.com/user_manual

Myanmar
https://mm.aoc.com/user_manual

New Zealand
https://nz.aoc.com/user_manual

Philippines
https://ph.aoc.com/user_manual

Singapore
https://sg.aoc.com/user_manual

ประเทศไทย
https://th.aoc.com/user_manual

Việt Nam
https://vn.aoc.com/user_manual

Middle East
https://me.aoc.com/user_manual

South Africa
https://za.aoc.com/user_manual

Brasil
https://aoc.portaltpv.com.br/

India
https://aoc.com/in-en/support

US
https://aoc.com/us/support


Canada
https://aoc.com/ca-en/support

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Product information for EU/UK Energy

Q41G32M261543A

AOC GAMING

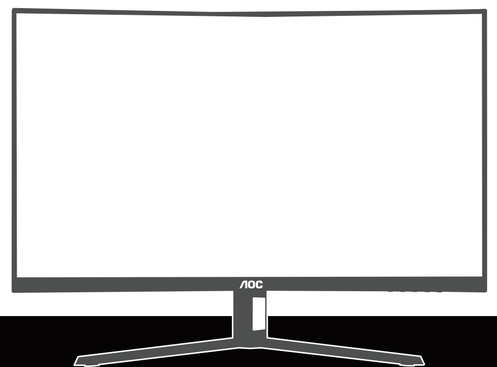


QUICK START GUIDE

CQ32G42FE

AOC GAMING MONITOR


©2026 AOC. All rights reserved

WWW.AOC.COM

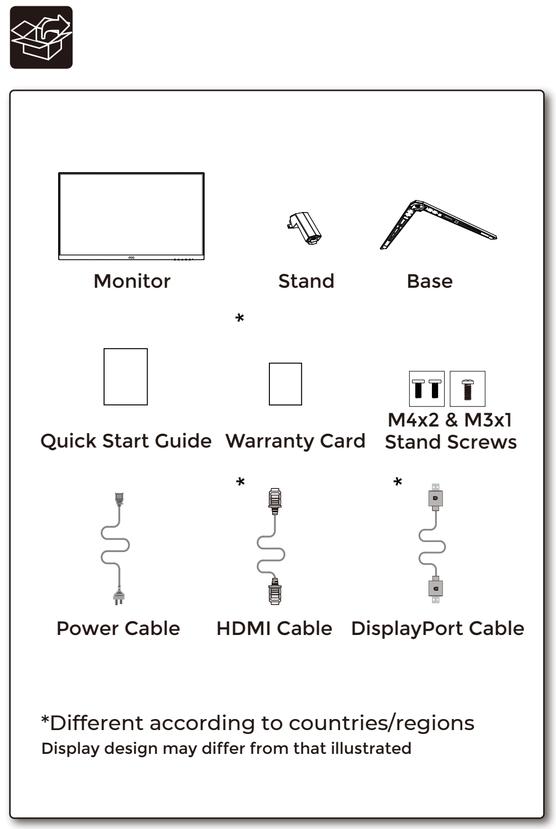


*Different according to countries/regions
Display design may differ from that illustrated


1

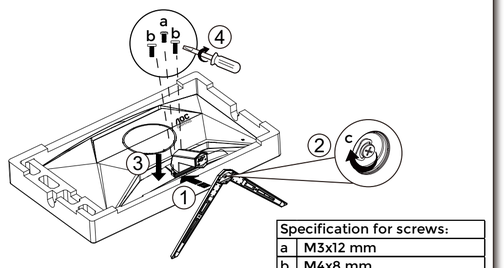


Specification for screws:	
a	M3x12 mm
b	M4x8 mm
c	M6x23 mm (effective thread 5.5 mm)

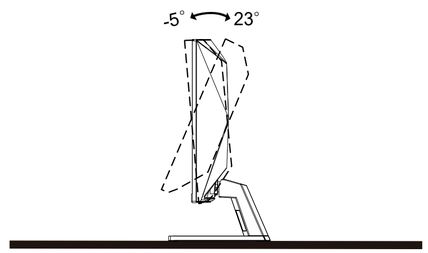


2

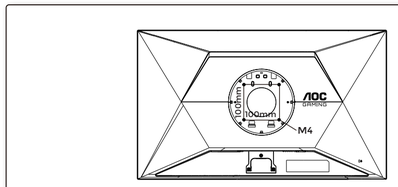


X4 Wall Mounting: M4*(10+X)mm
(X=Thickness of Wall mount bracket)



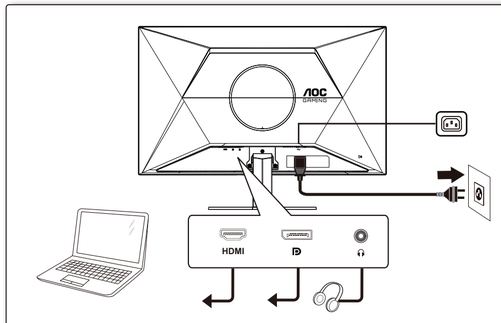

3

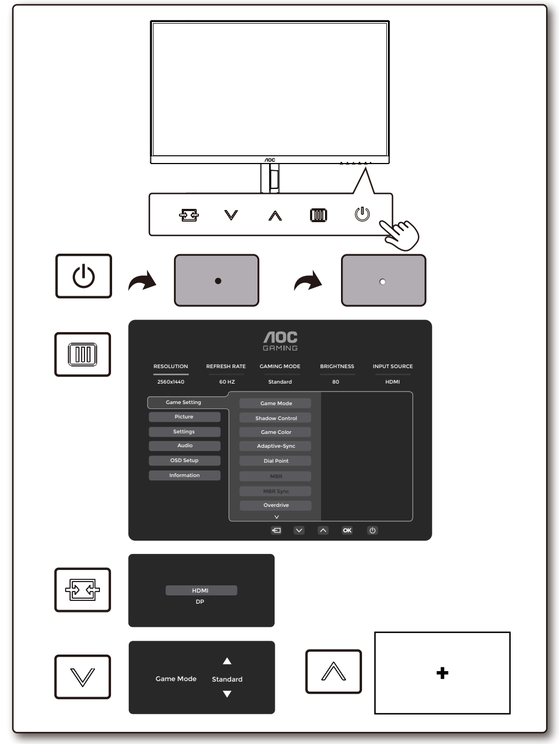

4

General Specification

Panel	Model Name	CQ32G42FE	
	Driving System	TFT Color LCD	
	Viewable Image Size	80.0cm diagonal(31.5" Wide Screen)	
	Pixel Pitch	0.2724mm(H) x 0.2724mm(V)	
Others	Horizontal Scan Range	30k-230kHz(HDMI) 30k-255kHz(DisplayPort)	
	Horizontal Scan Size(Maximum)	697.334mm	
	Vertical Scan Range	48~144Hz(HDMI) 48~170Hz(DisplayPort)	
	Vertical Scan Size(Maximum)	392.256mm	
	Max Resolution	2560X1440@144Hz(HDMI) 2560x1440@170Hz*(DisplayPort)	
	Plug & Play	VESA DDC2B/CI	
	Power Source	100-240V~ 50/60Hz 1.5A	
	Power Consumption	Typical (default brightness and contrast)	32W
		Max. (brightness =100, contrast =100)	≤ 51W
		Standby Mode	≤ 0.3W
	Dimensions(with stand)	709.4x523.8x265.3mm(WxHxD)	
	Net Weight	7.30kg	
Physical Characteristics	Connector Type	HDMI/DisplayPort/Earphone	
	Signal Cable Type	Detachable	
	Built-In Speaker	2Wx2	
Environmental	Temperature	Operating	0°C~ 40°C
		Non-Operating	-25°C~55°C
	Humidity	Operating	10%~85% (Non-Condensing)
		Non-Operating	5%~93% (Non-Condensing)
	Altitude	Operating	0m~5000m (0ft~16404ft)
		Non-Operating	0m~12192m (0ft~40000ft)

*Overclocking is achieved when resolution is at 2560x1440@165Hz/2560x1440@170Hz.
If any display error occurs during overclocking, please adjust the refresh rate to 144Hz.